


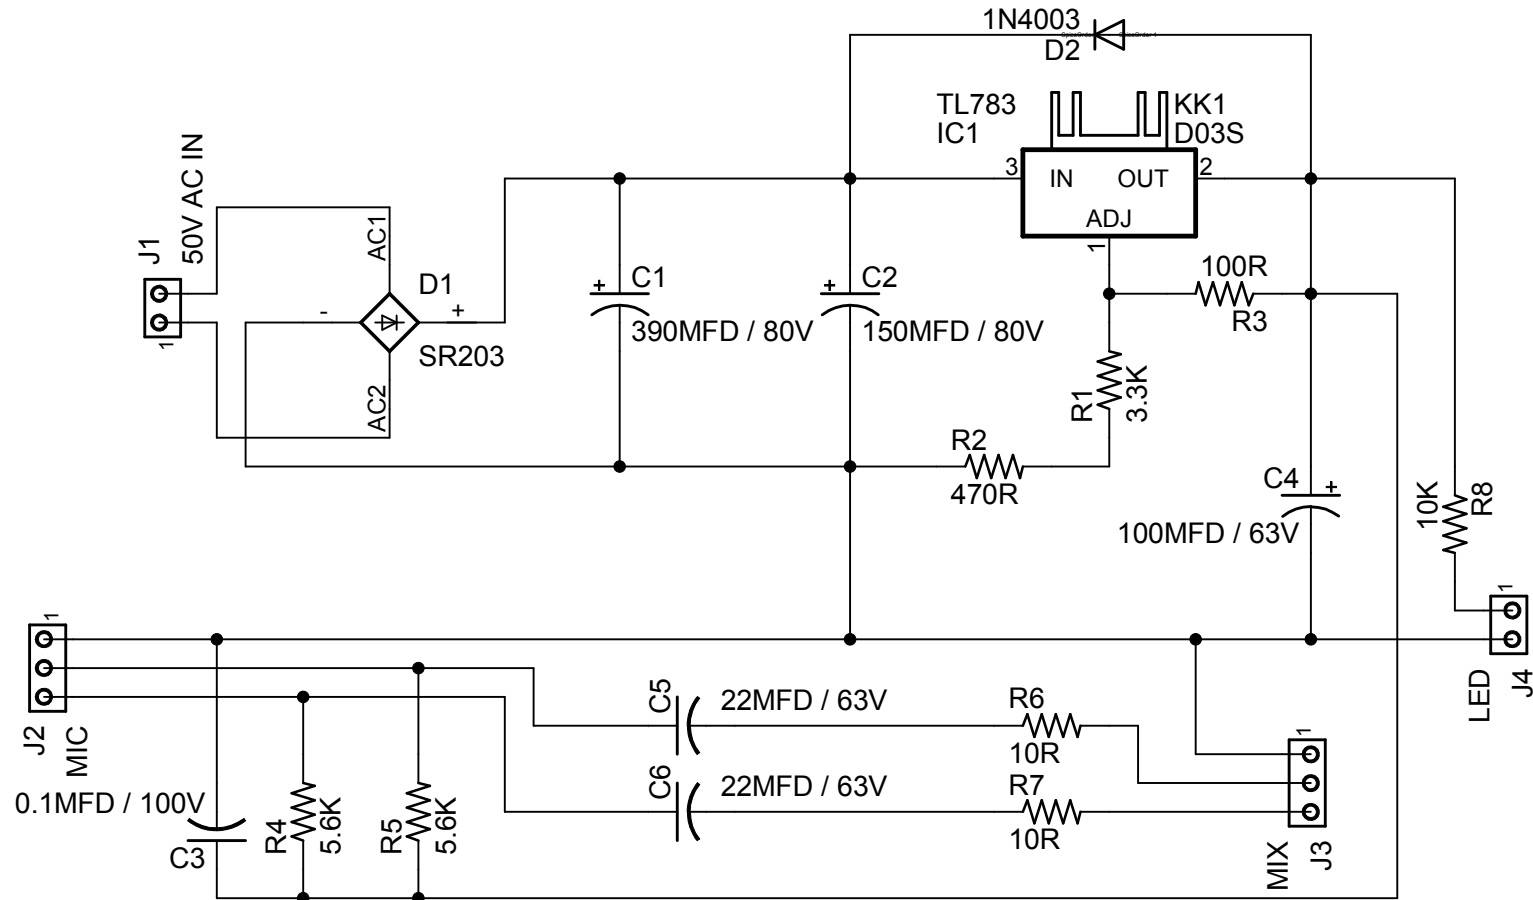

All resistors are 1W unless otherwise noted

Attach KK1 heat-sink to IC1

R4, R5 - Use 5.6K or 6.8K (1%) metal film resistors

J2, J3 - To XLR socket (1 - GND; 2 - Hot [Positive]; 3 - Cold [Negative])

C5, C6 - Bipolar capacitors

J4 - Power LED (Red)